

Chapter 13

Expressions (updated 17-July-2023)

This chapter describes the expression services in HCA. Expressions are used like in a traditional programming language to change the value of a variable.

This chapter covers these topics:

- Introduction to HCA expressions
- The Visual Programmer Compute and Compute Test elements
- The expression builder
- Managing variables
- Important uses of variables besides the Visual Programmer
- Error handling
- Expression syntax and built-in functions

In many cases the simpler variable values – Yes and No – and the three Visual Programmer elements – Make variable yes, Make variable No, and Not variable- are sufficient for applications. The Compute and Compute test elements are used for more sophisticated programming.

Introduction to expressions

As described in the chapter on the Visual Programmer, HCA variables are usually used with simple Yes and No values. But in addition to those you can create and manipulate variables that can store text, numeric, Boolean, or date-time values.

Each variable can contain data of any type. HCA converts the data to the type it needs for the operator being evaluated. For example, consider these expressions:

```
a = 10
b = 20
c = "The result is" + (a + b)
d = #01-01-2001#
e = a - "8"
```

After these expressions are evaluated:


```
a is a number with value 10
b is a number with value 20
c is a string with value "The result is 30"
d is a date
e is a number with value 2
```

If you understand, or can learn about, how expressions in traditional programming languages like Visual Basic work, you will understand HCA expressions.

Compute and Compute-Test visual programmer elements

To use these expressions two visual programmer elements are available: Compute and Compute Test.

The properties of the Compute element are:

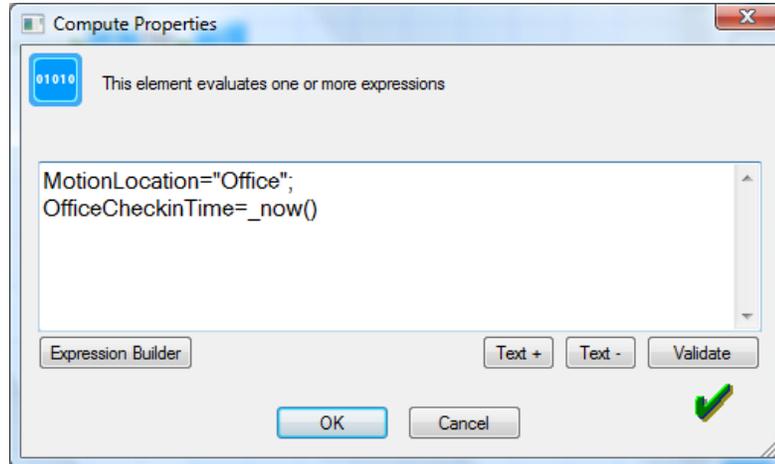

In the Compute element is placed a series of expressions each separated by semicolons.

<variable name> = <expression> ;


<variable name> = <expression> ;

...

<variable name> = <expression>

When the compute element is executed, the expressions are evaluated and the computed values assigned to the named variables. Expressions are executed in sequential order.

The Compute Test element contains a single expression that is evaluated to determine a yes or no value. If the value is "yes" the path marked "yes" in the program is taken from the Compute Test element, and likewise for "no".

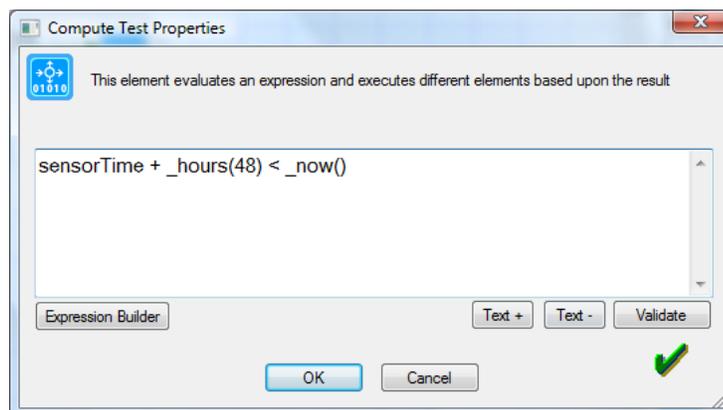


In both these elements the Validate button is used to check that the expression you have entered is correct – it matches the syntax that HCA expects.

A lot of work went into the Visual Programmer to allow HCA users to create programs without all the baggage of existing programming languages – careful syntax, programming terms and concepts. These two elements take a step back from that and leave you in the realm of the programmer. If you have never used, for example, Visual Basic, or all this sounds Greek to you, stick with simple yes and no variables managed with the visual programmer elements for them. You can do many wonderful things with them alone.

Expression builder

To help you create expressions, rather than always having to refer to this documentation, HCA contains a tool called the Expression Builder.


On dialogs where you enter an expression, a button labeled *Expression Builder* helps you compose your expression. Pressing this button opens the builder tool.

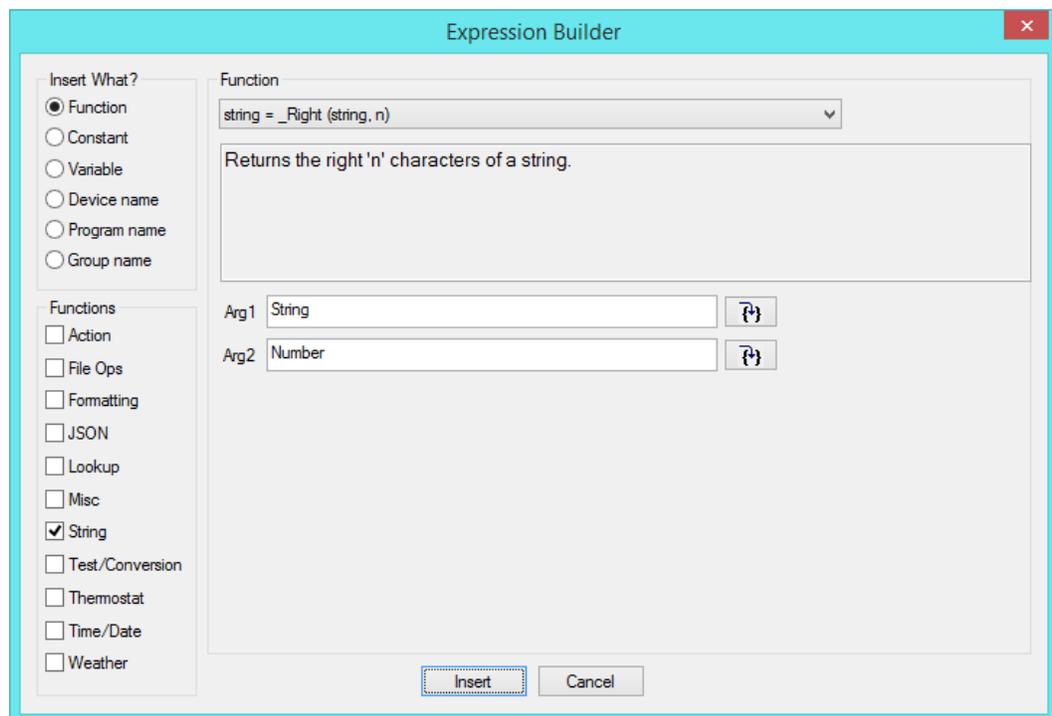

The “Insert what?” box specifies what sort of item you are inserting. The most common case is one of the HCA built-in functions.

The “Functions” box lets you limit the number of choices of the possible functions you have to choose from.

The third section of the dialog changes depending upon what you are inserting. In the picture above, a function is being inserted. Choose the name of the function in the dropdown and two things display: a short explanation of what it does, and the parameters to the function. In this example, the `_right` function takes two arguments. You can simply type in the two arguments, or to get more assistance, press the button next to the argument. This opens this dialog:

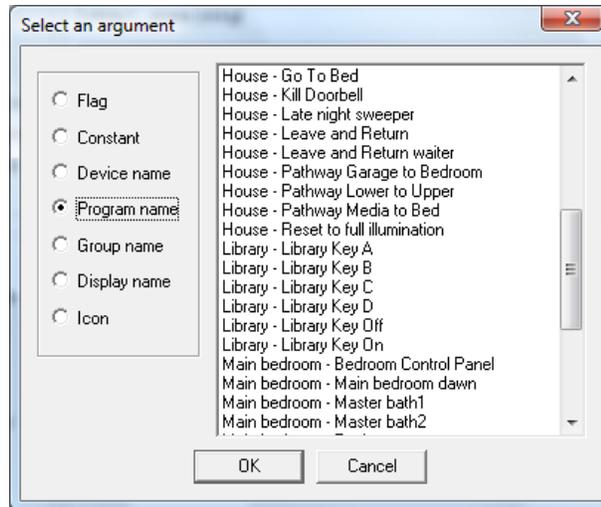

This dialog lets you insert common things that you may want to work with. Things like the names of the objects in your design, variables, and constants.

When you close the Expression Builder, the constructed expression is inserted into the text of the element properties at the cursor. Or it replaces the current selection if there is one.

Managing Variables

An important point about variables is that they usually get created when expressions are evaluated. When a program is executed any new variables that are used in its expressions appear in the variables list in the variable inventory dialog.

The variable inventory dialog is described in the chapter on design tools.

Other uses for expressions

In addition to using expressions in the Compute and Compute Test visual programmer elements, you can place expressions in other elements. Just enclose the expression in %'s. When the element is executed, the expression is evaluated and the result in text form replaces the % enclosed section. For example, to show the value of an expression, use this text in the ShowMessage element:

The value of beta is %beta1 + beta2%

If your string wants to display a percent sign, use two in the string:

Inside humidity is %humInside%% %

In these elements, an Embed Expression button appears. This lets you build an expression then encloses it in %'s when it places the expression into the element's properties.

To see in which elements an embedded expression can be used, see technical note titled "Parameter and expression use in program elements".

Error Handling

Because these elements happen at a more complex layer of HCA than most elements, errors can happen that could not be detected in the Visual Programmer. If errors occur while executing these elements, the errors are logged, the Compute or Compute Test element is abandoned, and execution continues with the next element. In the case of the Compute Test element execution follows the Yes path. These errors show up with a red "P" marker and can be filtered as an Error.

Some of the possible errors are:

- Naming a device, thermostat or a magic module as an argument to a function and no device, thermostat, or magic module with that name in your design.
- Divide by zero.
- Using a weather function but no weather provider available.
- Trying to construct a date-time with something out of range. Like a month of 13.

Expression Syntax

HCA expressions are very similar to expressions in any programming language like Visual Basic or VBScript. The usual operators are available:


Comparison operators	< > <= >= <> == Note that the operator that checks for equality is 2 equal signs not one
Arithmetic operators	+ - * / mod - (unary minus) + (unary plus)
Logical operators	and or not
Binary operators	Binary or operator is a Vertical bar Binary and operator is an Ampersand & Binary not operator is a circumflex ^
Date and Time constants	Enclosed in #'s as: #1/15/2001 07:19 AM#
Boolean constants	Yes No True False
String constants	Can be enclosed in single or double quotes
Variables	If the name of that variable has a blank in it, enclose the variable name in square brackets. For example [My Variable]

Tags

A “tag” is simply a name-value pair associated with an object in your design. The name can be any valid HCA name and the value is any text string. You can associate up to 8 “tags” with a room, device, program, group, or keypad.

What are tags good for? That is up to your design. You can use them to associate any piece of data with an object. The key idea behind tags is that programs can manipulate them – adding, deleting, and seeing if a device has a tag or a specific value of a tag. In this way you can have programs save data in a tag of an object and then later another program can read it out. In some ways they are like global variables except that the value is specific to each object.

In the properties dialog there is a “Tags” tab where the current tags assigned to an object are shown with their values. Using this you can view and modify tags and their values from the UI.

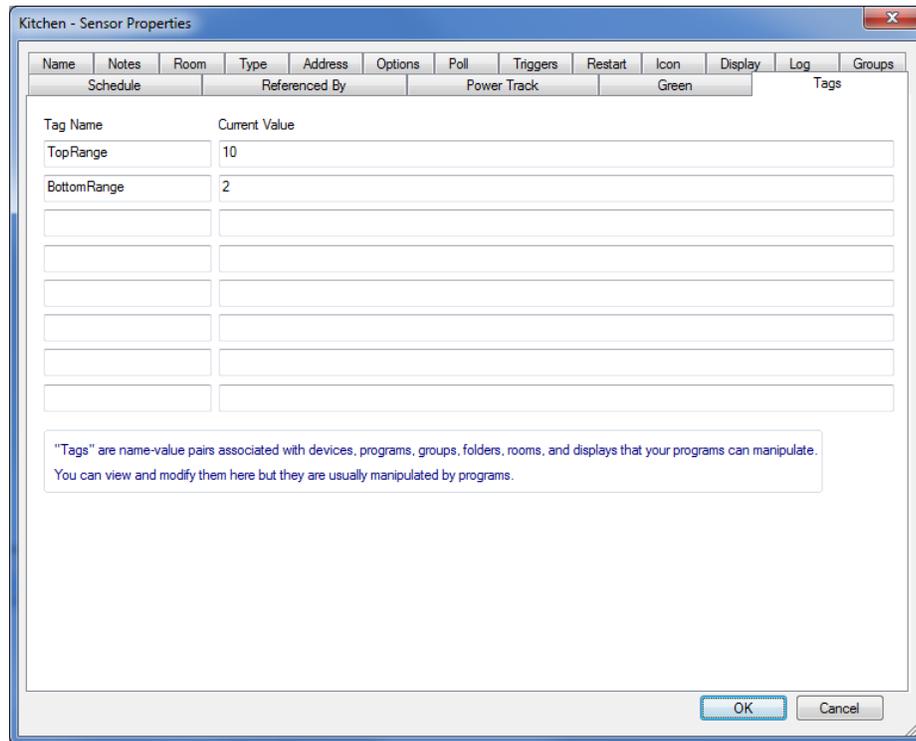

In addition to manually viewing and changing, these expression functions are available and described in the Lookup Functions section below:

- ObjectTagGet
- ObjectTagSet
- ObjectTagDelete
- ObjectTagExists

Expression functions

In the expressions used in the Compute and Compute-Test elements, you can use the built-in functions that HCA provides. Some of these are very general and can be found in almost any programming language, and others are specific to HCA.

Some notes on the function-by-function list below:

- In the list of functions below, some have optional parameters. These are designated by showing the parameter in []'s
- All functions return some value and in the Compute element you must assign that value to a variable. In the function list below if the result isn't useful, it is designated as "void".
- In creating expressions there are several functions that HCA provides. Some of these are very general and can be found in almost any programming language, and others are specific to HCA.
- All functions provided by HCA begin with the underscore character. If none of your variable names begin with an underscore, if in subsequent versions of HCA new functions are added, none of your variable names will conflict with any new function names. The case of the name is not important, so the left trim function can be written *Ltrim* or *ltrim*.

String functions

The string functions are identical to the Visual Basic functions of the same name.

Name	Asc
Result type	Number
Parameters	(string)
Action	Returns the ASCII value of the 1 st character of the string
Example	_Asc("A") → 65

Name	Chr
Result type	String
Parameters	(number, [# of repeats])
Action	Returns a one-character string of the ASCII character number unless the second argument is supplied then that tells the number of repeated characters to return.
Example	_Chr(65) → "A" _Chr(65, 3) → "AAA"

Name	DecToHex
Result type	String
Parameters	(number, # of hex digits)
Action	Converts a number to a string where the value is expressed in hexadecimal
Example	_DecToHex(100,2) → "64"

Name	HexToDec
Result type	Number
Parameters	(string)
Action	Converts a string containing hex characters into a number. Undefined if there are non-hex characters in the string.
Example	_HexToDec("64") → 100

Name	InStr
Result type	Number
Parameters	(string, string)
Action	Finds the location of a string within another string. Returns the character position where the 1 st character is 1. Returns 0 if not found.
Example	_InStr("webber", "bb") → 3

Name	LTrim
Result type	String
Parameters	(string)
Action	Trims white-space characters from the left side of a string
Example	<code>_LTrim(" example")</code> → “example”

Name	Lcase
Result type	String
Parameters	(string)
Action	Make a string lowercase
Example	<code>_Lcase("Webber")</code> → “webber”

Name	Left
Result type	String
Parameters	(string, number)
Action	Returns the leftmost ‘n’ characters
Example	<code>_Left("webber", 3)</code> → “web”

Name	Len
Result type	Number
Parameters	(string)
Action	Returns the number of characters in the string
Example	<code>_Len("webber")</code> → 6

Name	Match
Result type	Bool
Parameters	(string, pattern string)
Action	Performs a regular expression match between the supplied string and pattern. If the expression matches the pattern, then the function returns yes.
Example	<code>_Match("00773", "00.*")</code> → yes

Name	Mid
Result type	String
Parameters	(string, start at #, [# of characters])
Action	Returns characters from the start position for the supplied length. The first character in the string is 1. If the second argument is omitted the remainder of the start starting from the start position is returned.
Example	<code>_Mid("webber", 2, 3) → "ebb"</code>

Name	RTrim
Result type	String
Parameters	(string)
Action	Trims white-space characters from the right end of the string
Example	<code>_RTrim("webber ") → "webber"</code>

Name	Right
Result type	String
Parameters	(string, # characters)
Action	Returns the rightmost 'n' characters from a string
Example	<code>_Right("webber", 2) → "er"</code>

Name	TextPiece
Result type	String / Bool
Parameters	(string, piece #, delimiter string)
Action	Returns the nth piece of the string that contains sections of text between delimiters. If there is no nth piece in the string a bool of No is returned.
Example	<code>_TextPiece("apple,banana,grape", 2, ",") → "banana"</code>

Name	TextReplace
Result type	String
Parameters	(string, find string, replacement string)
Action	Replaces one string for another within a string.
Example	<code>_TextReplace("speed 10 mph", "mph", "miles per hour") → "speed 10 miles per hour"</code>

Name	Trim
Result type	String
Parameters	(string)
Action	Trims white-space characters from the left and right ends of a string.
Example	<code>_Trim(" webber ")</code> → "webber"

Name	Ucase
Result type	String
Parameters	(string)
Action	Uppercases a string.
Example	<code>_Ucase("webber")</code> → "WEBBER"

Test / Conversion functions

These functions are generally useful in creating programs, and many are like the corresponding Visual Basic functions.

Name	Abs
Result type	Number
Parameters	(number)
Action	Returns the absolute value of the number
Example	<code>_Abs(-87)</code> → 87

Name	Choose
Result type	Any
Parameters	(number, any, any, ...)
Action	Returns as its result the Nth argument. The 1 st argument chooses which argument to be returned. The <i>any</i> arguments can be of any types and there can be up to 10 of them
Example	<code>_Choose(3, "Jan", "Feb", "Mar", "Apr", "May")</code> → "Mar"

Name	HexToAscii
Result type	String
Parameters	(string)
Action	Assumes the text to be the text form of a series of 2-byte hex numbers. Returns a string decoded into the corresponding ASCII characters. See example.
Example	<code>_HexToAscii("41 42 43")</code> → "ABC"

Name	IIF
Result type	Any
Parameters	(bool, any1, any2)
Action	Returns any1 if the 1 st argument is yes. Otherwise returns any2.
Example	<code>_IIF (yes, "red", "blue") → "red"</code>

Name	Int
Result type	Number
Parameters	(any)
Action	Converts the argument to a number if not already a number and returns it discarding any fractional part
Example	<code>_Int(412.87) → 412</code> <code>_int("412.87") → 412</code> <code>_int("abc") → 0</code> <code>_int("") → 0</code>

Name	IsBool
Result type	Bool
Parameters	(any)
Action	Returns YES if the argument contains a bool value with <i>no</i> type coercion or an expression that evaluates to a bool.
Example	<code>_IsBool(TRUE) → Yes</code> <code>_IsBool(1) → No</code>

Name	IsDate
Result type	Bool
Parameters	(any)
Action	Returns YES if the argument contains a datetime value with <i>no</i> type coercion or an expression that evaluates to a dateTime.
Example	<code>_IsDate("web") → No</code>

Name	IsEven
Result type	Bool
Parameters	(number)
Action	Returns YES is the argument is an even number
Example	<code>_IsEven(13) → No</code>

Name	IsNumber
Result type	Bool
Parameters	(any)
Action	Returns YES if the argument contains a number value with <i>no</i> type coercion or an expression that evaluates to a number.
Example	<code>_IsNumber("412") → No</code> <code>_IsNumber(412) → Yes</code>

Name	IsOdd
Result type	Bool
Parameters	(number)
Action	Returns YES is the argument is an odd number
Example	<code>_IsOdd(13) → Yes</code>

Name	IsText
Result type	Bool
Parameters	(any)
Action	Returns YES if the argument contains a text value with <i>no</i> type coercion or an expression that evaluates to text.
Example	<code>_IsText("hello there") → Yes</code> <code>_IsText(400) → No</code>

Name	Max
Result type	Number
Parameters	(number, [number], [number], ...)
Action	Returns the maximum value of the arguments given. Up to 10 arguments.
Example	<code>_Max(10, 50, 13, 17) → 50</code>

Name	Min
Result type	Number
Parameters	(number, [number], [number], ...)
Action	Returns the minimum value of the arguments given. Up to 10 arguments.
Example	<code>_Min(10, 50, 13, 17) → 10</code>

Name	Num
Result type	Number
Parameters	(any)
Action	Converts the argument to a number if not already a number. Generally, not needed because HCA converts between strings and numbers as needed.
Example	<pre>_Num("100") → 100 _Num("abc") → No _Num("") → No</pre>

Name	Round
Result type	Number
Parameters	(number)
Action	Rounds the number to the nearest integer
Example	<pre>_Round(402.6) → 403</pre>

Time and date functions

For the examples below, assume that the current time is 02:12:45 pm and the current date is Friday 28-September-2018

Name	Date
Result type	DateTime
Parameters	(year #, month #, day#)
Action	Constructs a datetime value from the supplied year, month, and day. Year is the 4-digit year, month is 1-12, day is 1-31
Example	<code>_Date(2018, 9, 28)</code> → 28-Sep-2018

Name	DateTime
Result type	DateTime
Parameters	(year #, month #, day#, hour#, minute#, second#)
Action	Constructs a datetime value from the supplied year, month, day, hour, minute, second. Year is the 4-digit year, month is 1-12, day is 1-31, hour is 0-23, minute is 0-59, and second is 0-59
Example	<code>_DateTime(2018, 9, 28, 14, 16, 30)</code> → 28-Sep-2018 2:16:30pm

Name	Day
Result type	Number
Parameters	(dateTime)
Action	Returns the day from a dateTime
Example	<code>_Day(_Now())</code> → 28

Name	DayOfWeek
Result type	Number
Parameters	(dateTime)
Action	Returns the weekday from a dateTime as a number from 1 to 7, where 1 is Sunday
Example	<code>_DayOfWeek(_Now())</code> → 6

Name	DayOfYear
Result type	Number
Parameters	(dateTime)
Action	Returns the ordinal number of the day of the year
Example	<code>_DayOfYear(_now())</code> → 271

Name	Days
Result type	DateTimeSpan
Parameters	(#days)
Action	Creates a date time span equal to the number of days
Example	<code>_Now() + _Days(1)</code> → Saturday 28-September-2018 02:12:45 PM

Name	Hour
Result type	Number
Parameters	(dateTime)
Action	Returns the hour of a date time
Example	<code>_Hour(_Now())</code> → 14

Name	Hours
Result type	DateTimeSpan
Parameters	(#hours)
Action	Creates a date time span equal to the number of hours
Example	<code>_Now() + _Hours(2)</code> → Friday 28-September-2018 04:12:45 PM

Name	LocalToUTC
Result type	DateTime
Parameters	(dateTime)
Action	Convert a local time to UTC. The conversion is done by Windows so the local time zone and DST setting as set in Windows is used.
Example	<code>_LocalToUTC(_Now())</code> → Friday 28-September-2020 04:12:45 PM

Name	Minute
Result type	Number
Parameters	(dateTime)
Action	Returns the minute of a date time
Example	<code>_Minute(_Now())</code> → 12

Name	Minutes
Result type	DateTimeSpan
Parameters	(#minutes)
Action	Creates a dateTimeSpan equal to the number of minutes
Example	<code>_Now() + _Minutes(10)</code> → Friday 28-September-2018 02:22:45 PM

Name	Month
Result type	Number
Parameters	(dateTime)
Action	Returns the month of a date time
Example	<code>_Month(_Now())</code> → 9

Name	MonthName
Result type	String
Parameters	(month#, [use full name?])
Action	Returns the name of the month as a text string. If the optional 2 nd argument is supplied and is yes, the full name is generated otherwise an abbreviation is used.
Example	<code>_MonthName(_now(), yes)</code> → “September”

Name	Now
Result type	DateTime
Parameters	none
Action	Returns as a datetime the current date and time
Example	<code>_Now()</code> → Friday 28-September-2018 02:12:45 PM

Name	ParseTime
Result type	DateTime / Bool
Parameters	(“datetime text”)
Action	Parses the argument into a dateTime. Returns that datetime if the parse worked. Returns a Bool No if not.
Example	<code>_ParseTime(“10/4/2018 5:34:44 AM”)</code> → #10/4/2018 5:34:44 AM#

Name	Second
Result type	Number
Parameters	(dateTime)
Action	Returns the second part of a date time
Example	<code>_Second(_Now())</code> → 45

Name	Seconds
Result type	DateTimeSpan
Parameters	(#seconds)
Action	Creates a dateTimeSpan equal to the number of seconds
Example	<code>_Now() + _Seconds(10)</code> → Friday 28-September-2018 02:12:55 PM

Name	Sunrise
Result type	DateTime
Parameters	None
Action	Returns the sunrise time for the current location
Example	<code>_Sunrise()</code> → 9/28/2018 7:03 AM

Name	Sunset
Result type	DateTime
Parameters	None
Action	Returns the sunset time for the current location
Example	<code>_Sunset()</code> → 9/28/2018 6:57 PM

Name	Time
Result type	DateTime
Parameters	(hour, minute, second)
Action	Creates a dateTime with the given hour, minute, and second
Example	<code>_Time(14, 20, 0)</code> → 02:20:00 PM

Name	TimeSpan
Result type	DateTimeSpan
Parameters	(days, hours, minutes, seconds)
Action	Creates a dateTimeSpan with the given values
Example	<code>_Now() + _TimeSpan(0, 1, 20, 0)</code> → Friday 28-September-2018 03:32:45 PM

Name	TotalHours
Result type	Number
Parameters	(dateTimeSpan)
Action	Returns the total number of hours represented by the time span
Example	<code>_TotalHours(_TimeSpan(0, 1, 30, 0))</code> → 1.5

Name	TotalMinutes
Result type	Number
Parameters	(dateTimeSpan)
Action	Returns the total number of hours represented by the time span
Example	<code>_TotalMinutes(_TimeSpan(0, 1, 30, 0))</code> → 90

Name	TotalSeconds
Result type	Number
Parameters	(dateTimeSpan)
Action	Returns the total number of seconds represented by the time span
Example	<code>_TotalSeconds(_TimeSpan(0, 1, 30, 0))</code> → 5400

Name	UTCToLocal
Result type	DateTime
Parameters	(dateTime)
Action	Convert a UTC time to local time. The conversion is done by Windows so the local time zone and DST setting as set in Windows is used.
Example	<code>_UTCToLocal(_Now())</code> → Friday 28-September-2020 04:12:45 PM

Name	Weekday
Result type	String
Parameters	(#days ago)
Action	Returns the three-letter abbreviation of the weekday. (0) = today, (1) = yesterday, (2) = 2 days ago, etc.
Example	<code>_Weekday(2)</code> → “Wed”

Name	WeekdayName
Result type	String
Parameters	(number, [full name?])
Action	Returns a string of the weekday name. Sunday is numbered 1, and Saturday is numbered 7. If the second argument is supplied and is YES, the full name is returned, otherwise the 3-letter abbreviation is returned.
Example	<code>_WeekdayName(_DayOfWeek(_Now()), No)</code> → “Fri”

Name	Year
Result type	Number
Parameters	(dateTime)
Action	Returns the year of the dateTime
Example	<code>_Year(_Now())</code> → 2018

There are four major uses of the time functions in the Compute element. These are:

- Determine how long something took. This is done by:

```
t = _Now()
```

... do something...

timeItTook = _Now() - t

- Add or subtract from the current time to generate a date-time in the past or future:

TwentyFourHoursAgo = _Now() - _days(1)

SixAndAHalfHoursAgo = _Now() - _timeSpan(0, 6, 30, 0)

- Compose a date-time from its component parts:

t = _DateTime(2018, 9, 28, 14, 12, 45)

- Format a date-time to a string:

s = _FormatTime(_Now(), "\$d-\$b-\$y \$H:\$M")

This would show as "28-Sep-18 14:12"

Formatting functions

Name	FormatInt
Result type	String
Parameters	(#, #digits, [leading zeros?])
Action	Convert a number to a string with no fractional part. If the 3rd argument is supplied as YES, the string is formatted with leading zeros.
Example	_FormatInt(100.5, 4, 1) → "0100"

Name	FormatNum
Result type	String
Parameters	(#, #decimal places)
Action	Converts the number to a string with the given number of digits after the decimal point
Example	_FormatNum(1.6764, 1) → "1.6"

Name	FormatPatten
Result type	String
Parameters	(#, "pattern")
Action	Convert a number to a string according to the pattern. The pattern uses the same characters as that used for the C programming language sprintf function. Look online for references to sprintf. The only difference is the \$ character is used instead of the % character in the pattern.
Example	_FormatPattern (412.543, "\$f.1") → "412.5"

Name	FormatTime
Result type	String
Parameters	(dateTime)
Action	Returns a string of the date-time formatted according to the pattern. The pattern is a string made up of replacements from the following table.
Example	<code>_FormatTime(_now(), "\$d-\$b \$l:\$M \$p")</code> → "28-Sep 2:12 pm"

FormatTime pattern characters:

Pattern marker	Meaning
\$a	Abbreviated weekday name
\$A	Full weekday name
\$b	Abbreviated month name
\$B	Full month name
\$c	Date and time appropriate for locale
\$d	Day of month as number (01-31)
\$H	Hour in 24-hour format (00-23)
\$I	Hour in 12-hour format (01-12)
\$j	Day of year as a number (001-366)
\$m	Month as a number (01-12)
\$M	Minutes as a number (00-59)
\$p	Current locale's AM/PM indicator for 12-hour clock
\$S	Second as a number (00-59)
\$U	Week of year as a number, with Sunday as the first day of the week (00-51)
\$w	Weekday as a number (0-6). Sunday is 0.
\$W	Week of year as number with Monday as the first day of the week (00-51)
\$x	Date representation appropriate for locale
\$X	Time representation appropriate for locale
\$y	Year without century as a number (00-99)
\$Y	Year with century as number
\$z or \$Z	Time-zone name or abbreviation. Blank if not known
\$	Dollar sign

Action functions

These functions perform actions on your devices, programs, and groups in your design.

Name	AutoOffTime
Result type	Date-time / Bool
Parameters	("device name")
Action	Returns the date-time when the named device/room auto off timer will expire. If there is no auto off timer running for the named device/room, a Boolean value of NO is returned. This can be tested for with <code>_IsBool</code> function. Note: This function only reports the auto off time. You can make changes to the auto off timer and settings for a device using the Auto-Off programmer element.
Example	<code>_AutoOffTime("Kitchen – Lights")</code> → No

Name	ChangeSchedule
Result type	Bool
Parameters	("schedule entry name", code#, time1, [time2])
Action	Modifies the schedule entry with the given name. The codes are: 0 = Change On Time, 1 = Change Off Time, 2 = Change On and Off Time. With code 2 you must supply the 4 th argument. Returns YES if the modification is made, NO otherwise.
Example	<code>_ChangeSchedule("OutsideSet", 0, _Time(20,0,0))</code> → Yes This sets the on time of the schedule entry to 8pm

Name	ModifySchedule
Result type	Bool
Parameters	See below
Action	<code>_ModifySchedule</code> is a more capable replacement for <code>_ChangeSchedule</code> The first argument to <code>ModifySchedule</code> is a code that defines what the operation is. This is followed by up to 10 additional arguments. Arg1: Code 1 = Create schedule Arg2: Schedule name Arg3: [Optional] Name of parent schedule Arg1: Code 2 = Delete schedule Arg2: Schedule name Arg1: Code 3 = Clear schedule – remove all schedule entries Arg2: Schedule name Arg1: Code 4 = Create schedule entry Arg2: Schedule name Arg3: Entry name (can be "" for an unnamed entry) Arg4: Target name (device, program, or group being scheduled) Arg5: On code (0=nop, 1=atTime, 2=sunrise, 3=sunset)

	<p>Arg6: On data (if Arg5 is 1 then data is a time, if Arg5 is 2 or 3 then data is a signed # of minutes)</p> <p>Arg7: Off code (0=nop, 1=atTime, 2=sunrise, 3=sunset)</p> <p>Arg8: Off data (if Arg7 is 1 then data is a time, if Arg7 is 2 or 3 then data is a signed # of minutes)</p> <p>Arg9: Code for action (0=nop, 1=set-percent, 2=decrease-percent, 3 = increase-percent)</p> <p>Arg10: Percent data for arg9</p> <p>Arg11: Vary amount in minutes. If 0, then entry created without vary clause.</p> <p>An ON entry is created if arg5 and arg6 are supplied and arg7 and arg8 are omitted or arg7 is 0.</p> <p>An OFF entry is created if arg5 is 0, and arg7 and arg8 are supplied.</p> <p>An ON-OFF entry is created if args5, arg6, arg7, and arg8 are supplied, and arg5 and 7 are not 0.</p> <p>Arg1: Code 5 = Delete schedule entry Arg2: entry name</p> <p>Arg1: Code 6 = Modify schedule entry time Arg2: Entry name Arg3: On code (0=nop, 1=atTime, 2=sunrise, 3=sunset) Arg4: On data (if Arg3 is 1 then data is a time, if Arg3 is 2 or 3 then data is a signed # of minutes)</p> <p>Arg5: Off code (0=nop, 1=atTime, 2=sunrise, 3=sunset) Arg6: Off data (if Arg5 is 1 then data is a time, if Arg5 is 2 or 3 then data is a signed # of minutes)</p> <p>Arg1: Code 7 = Modify schedule entry date Arg2 = Entry name Arg3 = Code for date setting Arg4 = Data for date setting</p> <p>Arg3 codes: 0 = everyday, 1 = M-F, 2 = Sat-Sun, 3 = days of week, 4 = day of month</p> <p>Arg4 for when arg3=3 String of 7 characters when the first character represents Sunday and the last character represents Saturday. A dash means not this day, a non-dash character means this day. Suppose you wanted to set it for Wednesday and Friday, you would use “---X-X-”</p> <p>Arg4 for when arg3=4 is the number of the day of the month</p> <p>When modifying an existing schedule entry, the ON or OFF clause is modified if data is supplied or that part of the schedule entry is not modified if the code arguments for ON or OFF are 0 (for no operation)</p> <p>Returns YES if the action was possible, No otherwise. For example, a deletion of a schedule isn’t allowed if it is in use in a change schedule VP element.</p>
Example	<code>_ModifySchedule(4, "My Schedule", "", "Kitchen-Lights", 1, _Time(22,30,0))</code> → Yes

Name	CurrentScene
Result type	String
Parameters	("device name")
Action	Returns the current scene, if known, for the device.
Example	<code>_CurrentScene("kitchen - lights")</code> → "Nighttime"

Name	CurrentSchedule
Result type	String
Parameters	none
Action	Returns the name of the current schedule.
Example	<code>_CurrentSchedule()</code> → “Away”

Name	DayNight
Result type	Bool
Parameters	("Device name", code#, data)
Action	<p>Reprograms device, if possible, to change configuration</p> <p>Code 1: Change switch on-level. Data is percent 0-100</p> <p>Code 2: Change LED level. Data is "High", "Medium", "Low", "Faint", or "None"</p> <p>Code 3: Change backlighting. Data is "Off" or "On"</p> <p>Note: Not all devices can be reprogrammed.</p>
Example	<code>_DayNight("Kitchen – Lights", 1, 20) → Yes</code>

Name	DimDownPercent
Result type	Number
Parameters	("device name", percent)
Action	Decreases the named object percentage by the supplied amount. Returns 0 if able to send the command, -1 if not. Note that a return code of 0 only means the command was sent and not that the device received and acted upon it.
Example	<code>_DimDownPercent("Kitchen – Lights", 20) → 0</code>

Name	DimPercent
Result type	Number
Parameters	("device name", [request status?])
Action	<p>Returns the dim percentage of the named object.</p> <p>If the 2nd parameter is NO or omitted, the evaluation is based upon internal HCA state. If the 2nd parameter is YES and if the device is 2-way, its state is requested to determine the percent returned.</p>
Example	<code>_DimPercent("Kitchen – Lights") → 80</code>

Name	DimToPercent
Result type	Number
Parameters	("device name", percent)
Action	Controls the named object the supplied percentage. Returns 0 if able to send the command, -1 if not. Note that a return code of 0 only means the command was sent and not that the device received and acted upon it.
Example	<code>_DimToPercent("Kitchen – Lights", 50) → 0</code>

Name	DimUpPercent
Result type	Number
Parameters	("device name", percent)
Action	Increases the named object percentage by the supplied amount. Returns 0 if able to send the command, -1 if not. Note that a return code of 0 only means the command was sent and not that the device received and acted upon it.
Example	_DimUpPercent("Kitchen – lights", 10) → 0

Name	Hue
Result type	Bool – Yes if the operation worked, No if not
Parameters	See below
Action	<p>Function version of the Hue element. The first argument to the function is a code that determines the operation.</p> <p>Arg1: Code 0 = On Arg2: Device or Hue group name</p> <p>Arg1: Code 1 = Off Arg2: Device or Hue group name</p> <p>Arg1: Code 2 = Set to percent Arg2: Device or Hue group name Arg3: Percent</p> <p>Arg1: Code 3 = Set to color Arg2: Device or Hue group name Arg3: Color name or if providing the color by HSB: H Arg4: S Arg5: B</p> <p>Arg1: Code 4 = Set group to scene Arg2: Hue group name Arg3: Hue scene name Arg4: Percent, if omitted defaults to 100%</p>
Example	_Hue(2, "Kitchen – lights", 50) → Yes

Name	HueColorCreate
Result type	void
Parameters	("color name", hue, sat, brt, [update if already exists])
Action	<p>Adds or updates a color in the colors available for the Hue function and the Hue programmer element. If the final optional argument is present and if YES then the color is updated. Otherwise, if it exists it is not updated.</p> <p>This is useful for library programs to make colors available.</p>
Example	_HueColorCreate("Pink", 56018, 98, 216)

Name	IconChange
Result type	Void
Parameters	("name", ["icon name"], ["display name"])
Action	<p>Change the displayed icon for a device, program, group, or display.</p> <p>The 2nd parameter is the name of the icon to change to. If omitted, the original icon selected for the object is restored.</p> <p>The 3rd parameter is the name of the effected display. If omitted, then all displays with an icon for this object are changed.</p>
Example	_IconChange("Kitchen – lights", "Appliance")

Name	IconChangeEx
Result type	Void
Parameters	("name", code, [arg3], [arg4], [arg5])
Action	<p>Change the displayed icon for a device, program, group, or display. The 1st argument is the object whose icon is modified. The 2nd argument is a code.</p> <p>code=0 - Returns the icon to HCA control and resets the icon, icon representation, label, and annotation text</p> <p>code=1 - Changes the icon arg3: Icon name arg4: <Optional>Icon representation (0=On, 1=Off, 2=Dim)</p> <p>If the option 4th argument is present that sets the representation of the icon as specified. The state of the object doesn't change the icon representation.</p> <p>If the optional 4th argument is omitted, then while the icon image is changed, the state of the object controls the representation of the icon.</p> <p>code=2 - Changes the label text below the icon arg3: Label text</p> <p>code=3 - Change the text to the right of the icon if a theme with that feature is in use arg3: Text</p> <p>code=4 - Displays text over the icon ("annotation") arg3: Text (limited to 48 characters) arg4: <optional>Text size in points. If omitted uses 18 arg5: <optional>RGB of the text color. If omitted uses black (Hint: Use _RGB function)</p> <p>To make multiple lines, embed a newline character in the text where it breaks like this: "abc" + _chr(10) + "def"</p>
Example	_IconChangeEx("Kitchen – Lights", 2, "Ceiling Lights")

Name	IconExists
Result type	Bool
Parameters	("icon name", ["theme name"])
Action	Returns YES if the named icon exists in the named theme. If the theme argument is omitted, then the default theme is used.
Example	_IconExists ("Appliance") → YES

Name	InsteonBeep
Result type	Void
Parameters	("device name", code)
Action	Sends a command to the named Insteon device that should cause it to beep.
Example	_InsteonBeep ("Kitchen – Lights", 0)

Name	IsCurrentSchedule
Result type	Bool
Parameters	("schedule name")
Action	Returns YES if the named schedule is the current schedule.
Example	_IsCurrentSchedule("Away") → Yes

Name	IsDim
Result type	Bool / Number
Parameters	("Device name", [request status?])
Action	Returns YES if the named object is at 1% to 99% If the 2nd parameter is NO or omitted, the evaluation is based upon internal HCA state. If the 2nd parameter is YES, and the object supports status, its state is requested to determine the return value. If the device doesn't respond to the status poll, a -1 is returned.
Example	_IsDim("Kitchen – lights") → Yes

Name	IsDisabled
Result type	Bool
Parameters	("name")
Action	Returns Yes if the object is disabled.
Example	_IsDisabled("Kitchen – Lights") → No

Name	IsInErrorState
Result type	Bool
Parameters	("name")
Action	Returns yes if the object is in an error state due to a previous communication failure with the device.
Example	_IsInErrorState("Kitchen – Lights") → No

Name	IsOff
Result type	Bool / Number
Parameters	("Device name", [request status?])
Action	Returns YES if the named object is OFF, NO otherwise. If the 2nd parameter is NO or omitted, the evaluation is based upon internal HCA state. If the 2nd parameter is YES and the object supports status, its state is requested to determine the return value. If the device doesn't respond to the status poll, a -1 is returned.
Example	_IsOff("Kitchen Lights") → No

Name	IsOn
Result type	Bool / Number
Parameters	("Device name", [request status?])
Action	Returns YES if the named object is ON, NO otherwise. If the 2nd parameter is NO or omitted, the evaluation is based upon internal HCA state. If the 2nd parameter is YES and the object supports status, its state is requested to determine the return value. If the device doesn't respond to the status poll, a -1 is returned.
Example	_IsOn("Kitchen Lights") → Yes

Name	IsRunning
Result type	Bool
Parameters	("Program name", [optional bool])
Action	Returns YES if the program is currently running. If a second argument is supplied and has the value "yes", then the function returns true if the program is currently running *or* is waiting to start again because it uses the "run again" option. Without the second argument or if that argument is "no", only if the named program is currently running does the function return YES.
Example	_IsRunning("Home – Driveway Alert") → Yes

Name	IsSuspended
Result type	Bool
Parameters	("name")
Action	Returns YES if the named object is suspended
Example	_IsSuspended("Kitchen – lights") → No

Name	Off
Result type	Number
Parameters	("name", [button#])
Action	Controls the named object to OFF. If the optional 2nd argument is supplied, it designates a keypad button indicator. Returns 0 if able to send the command, -1 if not. Note that a return code of 0 only means the command was sent and not that the device received and acted upon it.
Example	_Off ("Kitchen – lights") → 0

Name	On
Result type	Number
Parameters	("name", [button#])
Action	Controls the named object to ON. If the optional 2nd argument is supplied, it designates a keypad button indicator. Returns 0 if able to send the command, -1 if not. Note that a return code of 0 only means the command was sent and not that the device received and acted upon it.
Example	_On ("Kitchen – lights") → 0

Name	SetCurrentState
Result type	Void
Parameters	("name", percent#)
Action	Change the internal maintained state of the named object to the percent supplied. The device is not actually communicated with. Also updates the icons for the device. 0% = OFF, 100% = ON, 1%-99% = Dim.
Example	_SetCurrentState("Kitchen – lights", 80)

Name	SetHomeMode
Result type	Bool
Parameters	(code#)
Action	Set new home mode using code values: 0 = Home & Awake, 1 = Home & Asleep, 2 = Away, 3 = 4 th mode Returns YES if successful, NO if not.
Example	_SetHomeMode(1) → Yes

Name	SetSchedule
Result type	Void
Parameters	("name")
Action	Makes the named schedule the current schedule.
Example	_SetSchedule("My vacation Schedule")

Name	SetRunAgainTime
Result type	Void
Parameters	(date-time, ["program name"])
Action	<p>Requests a program to start at the specified time. Does, in effect, the same action as the Auto-Start configuration on the program's Advanced Options tab but using a computed time rather than a fixed time as specified there.</p> <p>If the time is given as 0, any previous request for start is cancelled.</p> <p>If the 2nd argument is provided, the named program is the target otherwise it applies to the running program.</p>
Example	_SetRunAgainTime(_now() + _hours(1))

Name	SetToScene
Result type	String
Parameters	("name", "scene name")
Action	Controls a device to a named scene. Returns the current scene before the named scene is set.
Example	_SetToScene("Kitchen – lights", "nighttime") → ""

Name	StartProgram
Result type	void
Parameters	("program name", [arg1], [arg2], ... [arg8])
Action	<p>If the program doesn't "return a value" – option on program "Advanced Options" tab – then starts a program running independently from the program containing this function. Does not hold until that program is complete. If additional arguments are provided, they are passed to the started program.</p> <p>If the program being started returns a result – option enabled on the program "Advanced Options" tab - then the program that contains the Start-Program waits until the started program completes and the result of the StartProgram function is the value generated by the started program.</p>
Example	_StartProgram("Outside – HandleLights", 100, 10)

 Thermostat functions

Name	GetThermostat
Result type	Bool / Number
Parameters	("thermostat device name", code#)
Action	<p>Retrieves the thermostat setting given by the code from the table below. Returns a number if the operation worked and a bool of No if it didn't.</p> <p>It is up to the program that uses this function to request only settings supported by the thermostat and for the setpoints only when in the correct mode.</p> <p>The return value is the setting retrieved or an error. Use the <code>_IsBool</code> on the result to determine if you have received the requested data or an error.</p>
Example	<code>_GetThermostat("Home - Thermostat", 1) → 68</code>

Name	SetThermostat
Result type	Bool / Number
Parameters	("thermostat device name", code#, value#, [code#], [value#], ...)
Action	<p>Changes the thermostat setting given by the code to the value. Codes are given in the table below.</p> <p>Can change from 1 to 5 settings at once with optional code value pairs.</p> <p>Returns a Yes if the operation worked and No if it didn't. Use the <code>_IsBool</code> on the result to determine if the operation worked or an error.</p> <p>It is up to program that uses this function to change only settings supported by the thermostat and to change the setpoints only when in the correct mode.</p>
Example	<code>_SetThermostat("Home - Thermostat", 2, 68) → Yes</code>

Code	Setting	Returned value
0	Temperature	Integer value
1	Heat Setpoint	Integer value
2	Mode	Off = 0, Heat = 1, Cool = 2, Auto = 3
3	Fan	0 = On, 1 = Off
4	Economy	0 = On, 1 = Off
5	Aux Heat	0 = On, 1 = Off
6	Humidity	Integer value
7	Cool Setpoint	Integer value
8	Has Leaf (NEST only)	0 = On, 1 = Off
13	Nest Mode (NEST only)	0 = Away, 1 = Home When changing the NEST mode, it changes all thermostats in the structure associated with the thermostat being controlled.

Weather functions

Name	WeatherGet
Result type	Number
Parameters	("data item name", [code#], [#hours])
Action	<p>This function retrieves the named weather item in the units the provider is configured for.</p> <p>The item name, provided as a string, is the name of the weather item to retrieve. The item names are the same as used in the weather-test element: "Temperature", "Apparent Temperature", "Dew Point", etc.</p> <p>The code is optional and is specified as: 0=current, 1=max, 2=min, 3=average.</p> <p>The #hours argument is optional and is specified as a positive number for forecast data and as a negative number for historical data.</p> <p>If the data isn't available the value -999 is returned.</p>
Example	<pre>_WeatherGet("Wind speed", 1, -3) → 10.9 Gets the max wind speed in the last 3 hours</pre> <pre>_WeatherGet("Wind speed", 1, +3) → 3.2 Gets the max wind speed expected in the next 3 hours</pre>

Name	DarkSky
Result type	String
Parameters	("path1", ["path2"], ["path3"], ...)
Action	<p>Retrieves data from the dark sky weather provider using the supplied path. There can be from 1 to 10 arguments which are the path through the JSON. The path elements are not case sensitive.</p> <p>A program error happens if the weather provider is not dark sky. If the requested data isn't available -999 is returned. When retrieving a key whose value is time, a conversion is automatically done between dark sky time (UNIX time) and Windows time.</p> <p>If the first argument to the <code>_DarkSky</code> function is a number, that number is assumed to be a zip code and that location is used to fetch weather data. The remainder of the arguments are then taken to be the path to the data item wanted. For example, this displays the current temperature at the installation location:</p> <pre>void = _PgmNote("Temperature at home is " + _DarkSky("currently", "temperature"));</pre> <p>This displays the current temperature in Palm Springs California:</p> <pre>void = _PgmNote("Temp in PS is " + _DarkSky(92240, "currently", "temperature"));</pre> <p>See the Dark Sky technical note for more information.</p>
Example	<code>_DarkSky("currently", "pressure") → "1010.34"</code>

Name	BarometerConvert
Result type	Number
Parameters	(number, from units code#, to units code#)
Action	Converts between barometer units. The unit codes are: Inches = 0, Millimeters = 1, Millbars = 2, HectoPascals = 3
Example	_BarometerConvert (32, 0, 2) → 1015

Name	BarometerUnits
Result type	String
Parameters	None
Action	Returns a string of the barometer units
Example	_BarometerUnits() → "mb"

Name	HumidityUnits
Result type	String
Parameters	None
Action	Returns a string of the humidity units
Example	_HumidityUnits() → "%"

Name	RainConvert
Result type	Number
Parameters	(Number, from units code#, to units code#)
Action	Converts between rain units. The codes are: Inches = 0, Millimeters = 1
Example	_RainConvert (1, 0, 1) → 25.4

Name	RainUnits
Result type	String
Parameters	None
Action	Returns a string of the rain intensity units
Example	_RainUnits() → "in/hr"

Name	SolarRadiationUnits
Result type	String
Parameters	None
Action	Returns a string of the solar radiation units
Example	_SolarRadiationUnits() → "W/sq m"

Name	TempConvert
Result type	Number
Parameters	(number, from units code#, to units code#)
Action	Converts between temperature units. The codes are: F = 0, C = 1
Example	_TempConvert(32, 0, 1) → 0

Name	TempUnits
Result type	String
Parameters	None
Action	Returns a string of the temperature units
Example	_TempUnits() → "F"

Name	UVUnits
Result type	String
Parameters	None
Action	Returns a string of the UV units
Example	_UVUnits() → "UV Index"

Name	WindDirUnits
Result type	String
Parameters	None
Action	Returns a string of the wind direction units
Example	_WindDirUnits() → "degrees"

Name	WindDirection
Result type	String
Parameters	(number)
Action	Changes a wind direction in degrees into a string of the form: N, NNE, NE, ENE, etc.
Example	_WindDirection (90) → "E"

Name	WindSpeedConvert
Result type	Number
Parameters	(number, from units code#, to units code#)
Action	Converts between wind speed units. The codes are: Miles per hour = 0, Knots = 1, Kilometers per hour = 2, Meters per second = 3
Example	_WindSpeedConvert (10, 0, 2) → 16.09

Name	WindSpeedUnits
Result type	String
Parameters	None
Action	Returns a string of the wind speed units
Example	<code>_WindSpeedUnits()</code> → “m/s”

File operation functions

This category of functions comprises a set of functions that operate on disk-based files. HCA allows a maximum of 16 files to be open at one time.

Name	FileOpen
Result type	Number
Parameters	("path", open option)
Action	<p>Opens a file so that the ReadString and WriteString functions can be used.</p> <p>Option 0 = Open for Reading</p> <p>Option 1 = Open for Writing</p> <p>Option 2 = Open for writing and writes append to the end</p> <p>If the file can't be opened the result is -1 otherwise a number from 0 to 15 inclusive.</p>
Example	hFile = _FileOpen("myFile.txt", 1)

Name	FileClose
Result type	Void
Parameters	(file handle#)
Action	Closes a file previously opened with FileOpen. The argument is the value returned from FileOpen.
Example	Void = _FileClose(hFile)

Name	FileExists
Result type	Bool
Parameters	("path to the file")
Action	Determines if a file exists and returns Yes if it does and No if it doesn't.
Example	_FileExists("myFile.txt") → No

Name	FileLoad
Result type	String / Bool
Parameters	("path to the file", code#)
Action	<p>Opens the file at the supplied path, reads the contents and returns the file contents as one string. The options are:</p> <p>0 = copy CR-LF characters in the file into the result string, 1 = replace CR-LF characters in the file with a single blank in the result string</p> <p>Returns YES if worked, NO otherwise. Test with _IsText or _IsBool to check.</p> <p>There is no limit on the size of the file, but a really big file will probably break HCA.</p>
Example	_FileLoad("my file.txt", 0) → "The file contents"

Name	FileReadString
Result type	String / Bool
Parameters	(file handle #)
Action	<p>Reads from a file opened by <code>_FileOpen</code>.</p> <p>The handle parameter is the number returned from <code>_FileOpen</code></p> <p>If there is data remaining in the file, the result is the string read from the file.</p> <p>If there is no data remaining in the file, then the result is a bool value of No.</p> <p>The result can be tested with the <code>IsText</code> or <code>IsBool</code> functions.</p>
Example	<code>_FileReadString (hFile) → "A line from the file"</code>

Name	FileWriteString
Result type	Number
Parameters	(file handle #, "data to write")
Action	<p>Writes to a file opened by <code>_FileOpen</code>. The handle parameter is the number returned from <code>_FileOpen</code>. The number of characters written to the file is returned. If the string ends with an ASCII newline character, then the line written to the file ends with both a CR and NL characters. Create a newline with a <code>_chr(10)</code> function.</p>
Example	<code>_FileWriteString (hFile, "Hello web" + _chr(10))</code>

Name	FileDelete
Result type	Bool
Parameters	(path)
Action	<p>Deletes a file. If the delete is successful – the file existed and is now removed – Yes is returned, No otherwise.</p>
Example	<code>_FileDelete ("myfile.txt")</code>

Name	HCAFolder
Result type	String
Parameters	None
Action	Returns the path to the HCA sub-folder in your documents area.
Example	<code>_HCAFolder() → "c:\users\kimberly\documents\HCA"</code>

JSON functions

JSON is a method of encoding data. HCA has several functions that work with JSON. Refer to the JSON technical note for more information and examples.

Name	Json
Result type	String / Bool
Parameters	(handle, "key1", ["key2"], ["key3"]...)
Action	Retrieves a value from the parsed JSON starting at the current position. There can be from 2 to 10 arguments. arg1 is the handle returned by _JsonOpen arg2 - arg10 are the key names to find at each level. Returns the extracted data if found, NO otherwise. Use _IsBool to check the result.
Example	_Json(handle, "1", "action", "xy", "0") → "0.4573"

Name	JsonOpen
Result type	Number / Bool
Parameters	("text")
Action	Parses the JSON text into an internal form and returns a handle to it. If the parse fails, then the result is NO. Use _IsBool to check for failure. A valid return is a number 1 to 16 inclusive.
Example	Text = "{ \"Color\" : \"blue\" , \"State\" : true}"; hJson = _JsonOpen(text);

Name	JsonClose
Result type	Void
Parameters	(# returned from json open)
Action	Releases the parsed form of the JSON. The handle is what was returned by _JsonOpen.
Example	_JsonClose(hJson)

Name	JsonDown
Result type	Bool
Parameters	(# returned from json open)
Action	Moves the current position to the first child of the current key in the parsed JSON. The handle is what was returned by _JsonOpen. Returns YES if there if the move was successful, NO otherwise.
Example	_JsonDown(hJson) → Yes

Name	JsonNext
Result type	Bool
Parameters	(# returned from json open)
Action	Moves the current position to the next key in the parsed JSON. The handle argument is what was returned by _JsonOpen. Returns YES if there if the move was successful, NO otherwise.
Example	_JsonNext(hJson) → Yes

Name	JsonPrev
Result type	Bool
Parameters	(# returned from json open)
Action	Moves the current position to the previous key in the parsed JSON. The handle argument is what was returned by _JsonOpen. Returns YES if there if the move was successful, NO otherwise.
Example	_JsonPrev(hJson) → Yes

Name	JsonUp
Result type	Bool
Parameters	(# returned from json open)
Action	Moves the current position to the parent of the current key in the parsed JSON. The handle argument is what was returned by _JsonOpen. Returns YES if there if the move was successful, NO otherwise.
Example	_JsonUp(hJson) → Yes

Name	JsonCurrentKey
Result type	text
Parameters	(# returned from json open)
Action	Returns the key from the current position in the JSON as moved by JsonUp, JsonDown, JsonNext, JsonPrev
Example	_JsonCurrentKey(hJson) → "Color"

Name	JsonCurrentValue
Result type	text
Parameters	(# returned from json open)
Action	Returns the value from the current position in the JSON as moved by JsonUp, JsonDown, JsonNext, JsonPrev
Example	_JsonCurrentValue(hJson) → "Blue"

Lookup functions

This category of functions is useful for working with the elements of your design.

Name	AddressForDevice
Result type	String
Parameters	("device name")
Action	Returns the "address" of the device. Formatted as per the protocol of the device.
Example	<code>_AddressForDevice("Den – Plug")</code> → "192.168.0.182"

Name	CurrentWattage
Result type	Number
Parameters	(["device or room name"])
Action	Returns the current wattage used by the device or room. With no argument supplied it returns the whole home current wattage.
Example	<code>_CurrentWattage("Kitchen – Lights")</code> → 400

Name	DesignOpen
Result type	Number
Parameters	(code#, ["room-folder name"], ["tag name"], ["tag value"])
Action	<p>Works with <code>_DesignName</code> and <code>_DesignClose</code> to allow you to operate on each element in your design. Which elements depends upon the code used.</p> <p>Code=1 devices, code=2 programs, code=3 groups, code=4 rooms & folders, code=5 variables, code=6 only rooms, code=7 only folders, code=8 only displays.</p> <p>If the optional 2nd argument is used for codes 1-3, then it limits what <code>_DesignName</code> returns to the contents of the folder or room given by the 2nd argument.</p> <p>The optional 3rd argument limits what <code>_DesignName</code> returns to those objects that have that tag. If you are using the 3rd or 4th argument and don't want to limit it to a specific room, use "" for the 2nd argument.</p> <p>If the optional 4th argument is used, it is further limited to those objects that have the tag with the given value.</p> <p>A valid return is a number from 0 to 15 inclusive.</p>
Example	<code>hDesign = _DesignOpen(1, "Kitchen")</code>

Name	DesignClose
Result type	Void
Parameters	(# returned from DesignOpen)
Action	Close the design opened with <code>_DesignOpen</code> . The one argument must be the value returned from <code>_DesignOpen</code> .
Example	<code>Void = _DesignClose (hDesign)</code>

Name	DesignName
Result type	String
Parameters	(# returned from DesignOpen)
Action	Returns the name of the current design element and moves to the next element. This allows you to use <code>_DesignName</code> until it returns an empty string. This generates the names of all your design elements based upon the arguments to <code>_DesignOpen</code> .
Example	<code>Name = _DesignName (hDesign)</code>

Name	DesignTitle
Result type	String
Parameters	None
Action	Returns the title set in the Home Properties dialog.
Example	<code>_DesignTitle()</code> → “Kimberly’s Villa”

Name	DeviceForAddress
Result type	String
Parameters	(“Protocol name”, “address”)
Action	Locates a device and returns the name of that device by looking for a device of the supplied protocol with the address. The address is formatted differently for each protocol. The protocols are: “X10”, “Insteon”, “UPB”, “Hue”, “Wireless”, or the name of a user class. Returns the empty string if no such device.
Example	<code>_DeviceForAddress(“Insteon”, “02.62.4b”)</code> → “Den – Light”.

Name	GetDeviceKind
Result type	Number
Parameters	(“device name”)
Action	Returns a value that is the kind of device. possibilities are: 0: Other, 1: Switch, 2: Module, 3: Light, 4: Input, 5: Lock, 6: Camera, 7: Keypad with load, 8: Keypad, 9: IR Output, 10: Fan, 11: Thermostat
Example	<code>_GetDeviceKind (“Kitchen-Lights”)</code> → 1

Name	GetDeviceMake
Result type	String
Parameters	("device name")
Action	Returns the name of the device manufacturer if known
Example	_GetDeviceMake ("Kitchen – lights") → "PulseWorx"

Name	GetDeviceModel
Result type	String
Parameters	("device name")
Action	Returns the name of the device model if known
Example	_GetDeviceModel ("Kitchen – lights") → "WS1D Wall switch"

Name	GetDeviceProtocol
Result type	String
Parameters	("device name")
Action	Returns the protocol of the device. The protocols are: "X10", "Insteon", "UPB", "Hue", "Wireless" or the name of a user class.
Example	_GetDeviceProtocol ("Kitchen – lights") → "UPB"

Name	GetObjectProperty
Result type	String
Parameters	("object name", "property name")
Action	Returns the named property for an object. Currently implemented properties are: "FixedId". Result is a number that can be saved outside of HCA to reference the object. It will not change with time or HCA restart. "SupportsSetPercent" or "IsDimmable". Returns a bool result of YES if the named device, program, or group is capable of setting to a percent in addition to ON and OFF "SupportsOn". Returns a bool result of YES is the named device, program, or group is capable of an ON operation. "SupportsOff". Returns a bool result of YES is the named device, program, or group is capable of an OFF operation. "Wattage". Returns the current wattage of the device. "ProgramAsDevice". Returns a bool result of YES is the named program has the option enabled for HCA to treat this program as if it were a device, "FriendlyName". Returns a string result of the voice "friendly" name of the object.
Example	_GetObjectProperty ("Kitchen – lights", "Friendly Name") → "Kitchen counter"

Name	GroupMemberCount
Result type	Number
Parameters	("group name")
Action	Returns the number of members in the group.
Example	_GroupMemberCount ("Outside – lights") → 5

Name	GroupMemberName
Result type	String
Parameters	("group name", member#)
Action	Returns the name of the ith member of the group.
Example	_GroupMemberName ("Outside – lights", 2) → "Left light"

Name	HomeMode
Result type	Number
Parameters	None
Action	Returns the current home mode. 0 = Home & Awake, 1 = Home & Asleep, 2 = Away, 3 = 4 th mode.
Example	_HomeMode() → 0

Name	IsValidObject
Result type	Bool
Parameters	("name", code#)
Action	Returns YES if the design contains an object with the name of the specified type. Codes are: 0:Device, 1:Program, 2:Group, 3:Room/Folder/Display, 4:Schedule, 5:Global Variable, 6:room, 7:folder, 8:display.
Example	_IsValidObject("Kitchen – lights", 0) → yes

Name	LastControlTime
Result type	Date-Time
Parameters	("device, program, or room name")
Action	Returns the time of the last control of the device or, for a program, when last started. Returns a Boolean NO, if no control time is available. Use _IsBool to check the result. If a room name is supplied, it returns the latest control of any device in the room.
Example	_LastControlTime ("Kitchen – Lights") → 28-Sep-1018 07:03

Name	LastReceptionTime
Result type	Date-time
Parameters	("device or room name")
Action	Returns the time of the last reception from the device. Returns a Boolean NO, if no reception time is available. Use <code>_IsBool</code> to check the result. If a room name is supplied, it returns the latest reception from any device in the room.
Example	<code>_LastReceptionTime ("Kitchen – Lights")</code> → 28-Sep-1018 07:04

Name	ObjectTagClear
Result type	Bool
Parameters	("object name")
Action	Removes all tags from a device, program, group, room, folder, or display.
Example	<code>_ObjectTagClear ("Kitchen – Lights")</code>

Name	ObjectTagDelete
Result type	Bool
Parameters	("object name", "tag name")
Action	Removes from a device, program, group, room, folder, or display the supplied tag. If the tag doesn't exist for that object, NO is returned, YES otherwise.
Example	<code>_ObjectTagDelete ("Kitchen – Lights", "color")</code> → yes

Name	ObjectTagExists
Result type	Bool
Parameters	("object name", "tag name", ["tag value"])
Action	Checks if a device, program, group, room, folder, or display has the supplied tag and optionally checks that the tag value matches the supplied value. If the tag isn't assigned to the object, NO is returned. If the tag is assigned to the object and the value argument is omitted, YES is returned. If the value argument is supplied, YES if returned if the tag value matches the supplied value.
Example	<code>_ObjectTagExists ("Kitchen – Lights", "color", "blue")</code> → yes

Name	ObjectTagGet
Result type	String / Bool
Parameters	("object name", "tag name")
Action	Returns the value of the tag assigned to the device, program, group, room, folder, or display with the supplied name. If the object doesn't have that tag returns NO. Use <code>_IsBool</code> to check the result.
Example	<code>_ObjectTagGet("Kitchen – lights", "color") → "blue"</code>

Name	ObjectTagSet
Result type	Bool
Parameters	("object name", "tag name", "tag value")
Action	Assigns to the supplied device, program, group, room, folder, or display a tag with the supplied value. If the tag doesn't exist for that object one is added to it. If there is no room for a new tag for that object - it already has the maximum number - a bool NO is returned.
Example	<code>_ObjectTagSet("Kitchen – lights", "color", "blue") → yes</code>

Name	SetCurrentWattage
Result type	Void
Parameters	("device name", wattage#)
Action	Change the current wattage used by the device when at 100% to the value supplied.
Example	<code>_SetCurrentWattage("Kitchen – lights", 400)</code>

Name	SetObjectProperty
Result type	Bool
Parameters	("object name", "property name", value)
Action	Sets information about the named object. These properties can be set, and the type of data expected. "LastReceptionTime" -> date-time "LastControlTime" -> date-time "ControlCount" -> number "LastExecutionTime" -> date-time "ExecutionCount" -> number "AlertOptOut" -> Boolean Returns YES if the update is made, NO otherwise
Example	<code>_SetObjectProperty ("Kitchen – lights", "LastReceptionTime", _Now())</code>

Name	Statistics
Result type	Number
Parameters	(code#, ["name"])
Action	<p>Returns statistics since HCA was started based upon the supplied code.</p> <p>[Code = 1] Total number devices controlled, unless a device name is given and then the count is for only that device</p> <p>[Code = 2] Total number of programs executed, unless a program name is given and then the count is for only that program</p> <p>[Code = 3] Total number of client connections</p> <p>[Code = 4] Total number of messages from all interfaces unless the interface number is given then the count is for only that interface. Interfaces are numbered 1 to 8. Note that numbering is different than <code>_InterfaceName</code> and <code>_InterfaceStatus</code>.</p> <p>[Code = 5] Current number of open JSON handles</p> <p>[Code = 6] Current number of open design handles</p> <p>[Code = 7] Current number of open file handles</p> <p>For codes 1-4, if the code has a negative value, it clears the statistics, either the total or for a specific object. Examples:</p> <p><code>_Statistics (1)</code> → the total count for all devices <code>_Statistics (1, "Kitchen")</code> → the total for all devices in the kitchen <code>_Statistics (1, "Kitchen - Lights")</code> → the count for only that single device <code>_Statistics (-1)</code> → clear counter for every device <code>_Statistics (-1, "Kitchen")</code> → clear counter for every device in the kitchen <code>_Statistics (-1, "Kitchen - Lights")</code> → clear counter for kitchen-Lights</p>
Example	<code>_Statistics(2)</code> → 26

Name	Status
Result type	String
Parameters	("object name")
Action	<p>Returns a readable string which shows the status of the device, program, or group. What is returned depends upon the type of the object, and if a device, the type of the device.</p>
Example	<code>_Status("Kitchen - lights")</code> → "75%"

Miscellaneous functions

Functions comprises a set of generally useful things that are not in any other category.

Name	AlertAdd																																																																										
Result type	Void																																																																										
Parameters	(alert#, "arg1", "arg2")																																																																										
Action	<p>Raises an alert. How alerts are configured determines the effect of this. Any of the alerts in HCA can be added. The following table shows the codes and the expected text of the arguments.</p> <table border="1"> <thead> <tr> <th>Use</th> <th>Code</th> <th>Arg1</th> <th>Arg2</th> </tr> </thead> <tbody> <tr> <td>User 1 - 8</td> <td>1 to 8</td> <td>Any text wanted</td> <td>Not used</td> </tr> <tr> <td>No reception group 1-4</td> <td>9 to 12</td> <td>Device name</td> <td>Any text wanted</td> </tr> <tr> <td>Confirm receipt ACK fail</td> <td>13</td> <td>Device name</td> <td>Any text wanted</td> </tr> <tr> <td>Confirm receipt by status fail</td> <td>14</td> <td>Device name</td> <td>Any text wanted</td> </tr> <tr> <td>Confirm receipt by status all failed</td> <td>15</td> <td>Device name</td> <td>Any text wanted</td> </tr> <tr> <td>Status request not answered</td> <td>16</td> <td>Device name</td> <td>Any text wanted</td> </tr> <tr> <td>UPB reception missing sequence packet</td> <td>17</td> <td>Device name</td> <td>Any text wanted</td> </tr> <tr> <td>Unknown reception</td> <td>18</td> <td>Any text wanted</td> <td>Not used</td> </tr> <tr> <td>Program error</td> <td>19</td> <td>Program name</td> <td>Any text wanted</td> </tr> <tr> <td>Interface error</td> <td>20</td> <td>Interface name + ": " + error text</td> <td>Not used</td> </tr> <tr> <td>Interface disconnect</td> <td>21</td> <td>Interface name</td> <td>Not used</td> </tr> <tr> <td>Power out</td> <td>22</td> <td>String showing time</td> <td>Not used</td> </tr> <tr> <td>Power restored</td> <td>23</td> <td>String showing time</td> <td>Not used</td> </tr> <tr> <td>Weather observation failed</td> <td>24</td> <td>Weather provider name</td> <td>Not used</td> </tr> <tr> <td>Client disconnect</td> <td>25</td> <td>Any text wanted</td> <td>Not used</td> </tr> <tr> <td>Cloud DDNS update failed</td> <td>26</td> <td>Any text wanted</td> <td>Not used</td> </tr> <tr> <td>Cloud disconnect</td> <td>27</td> <td>Any text wanted</td> <td>Not used</td> </tr> </tbody> </table>			Use	Code	Arg1	Arg2	User 1 - 8	1 to 8	Any text wanted	Not used	No reception group 1-4	9 to 12	Device name	Any text wanted	Confirm receipt ACK fail	13	Device name	Any text wanted	Confirm receipt by status fail	14	Device name	Any text wanted	Confirm receipt by status all failed	15	Device name	Any text wanted	Status request not answered	16	Device name	Any text wanted	UPB reception missing sequence packet	17	Device name	Any text wanted	Unknown reception	18	Any text wanted	Not used	Program error	19	Program name	Any text wanted	Interface error	20	Interface name + ": " + error text	Not used	Interface disconnect	21	Interface name	Not used	Power out	22	String showing time	Not used	Power restored	23	String showing time	Not used	Weather observation failed	24	Weather provider name	Not used	Client disconnect	25	Any text wanted	Not used	Cloud DDNS update failed	26	Any text wanted	Not used	Cloud disconnect	27	Any text wanted	Not used
Use	Code	Arg1	Arg2																																																																								
User 1 - 8	1 to 8	Any text wanted	Not used																																																																								
No reception group 1-4	9 to 12	Device name	Any text wanted																																																																								
Confirm receipt ACK fail	13	Device name	Any text wanted																																																																								
Confirm receipt by status fail	14	Device name	Any text wanted																																																																								
Confirm receipt by status all failed	15	Device name	Any text wanted																																																																								
Status request not answered	16	Device name	Any text wanted																																																																								
UPB reception missing sequence packet	17	Device name	Any text wanted																																																																								
Unknown reception	18	Any text wanted	Not used																																																																								
Program error	19	Program name	Any text wanted																																																																								
Interface error	20	Interface name + ": " + error text	Not used																																																																								
Interface disconnect	21	Interface name	Not used																																																																								
Power out	22	String showing time	Not used																																																																								
Power restored	23	String showing time	Not used																																																																								
Weather observation failed	24	Weather provider name	Not used																																																																								
Client disconnect	25	Any text wanted	Not used																																																																								
Cloud DDNS update failed	26	Any text wanted	Not used																																																																								
Cloud disconnect	27	Any text wanted	Not used																																																																								
Example	_AlertAdd(1, "Check pump")																																																																										

Name	AlertCount
Result type	Number
Parameters	(alert#, [device or room name])
Action	<p>Returns the number of alerts for the supplied code. For alerts related to a device, if the optional second argument is supplied as a device name, then the count of alerts of the type for that device are returned. If a room name is supplied, then a total count of alerts for all devices in the room with that type of alert.</p> <p>Codes are:</p> <ul style="list-style-type: none"> 1: User alert 1 2: User alert 2 3: User alert 3 4: User alert 4 5: User alert 5 6: User alert 6 7: User alert 7 8: User alert 8 9: No reception group 1 10: No reception group 2 11: No reception group 3 12: No reception group 4 13: No ACK from device (Confirm receipt failed) 14: Confirm receipt of command failed 15: All attempts at confirm receipt of command failed 16: Status poll fails 17: UPB missing sequence packet 18: Unknown reception 19: Program error 20: Interface error 21: Interface disconnect 22: Power out (interface disconnected) 23: Power restored (interface reconnected) 24: Weather observation failed 25: Client disconnected abnormally 26: Cloud update failed 27: Cloud connected server disconnected
Example	<code>_AlertCount(7) → 1</code>

Name	AlertClear
Result type	Void
Parameters	(alert#, [device or room name])
Action	<p>Clears the alert given by the #. The Alert number is the same as supplied to <code>_AlertCount</code>. If the optional second argument is supplied as a device name, then that alert for only that device is cleared. If a room name is supplied, then that alert type for all devices in the room are cleared.</p>
Example	<code>_AlertClear(1)</code>

Name	AlertLevel
Result type	Number
Parameters	(alert#)
Action	Returns the level of the alert. This is the color for that alert as seen in the Alert Manager. Green=0, Yellow=1, Red=2
Example	<code>_AlertLevel(11) → 1</code>

Name	AlertName
Result type	String
Parameters	(alert#)
Action	Returns the text that HCA shows in the Alert Summary display. Don't forget that the User alerts 1-8 and the Overdue alerts 1-4 can be renamed by the user. <code>_AlertName</code> return those names
Example	<code>_AlertName(16) → "Status request and no reply"</code>

Name	Assign
Result type	Void
Parameters	("variable name", any)
Action	Assigns to the named variable – given by a string - the value given by the second argument. If the variable doesn't exist a global variable is created.
Example	<code>_Assign("My variable", 17)</code>

Name	Delay
Result type	Number
Parameters	(time-span1, [time-span2])
Action	If one argument is supplied, then delays for that amount of time. If two arguments are supplied, then delays for a time somewhere between the two time spans. Returns the number of seconds delayed.
Example	<code>_Delay(_Minutes(1), _Minutes(10)) → 117</code>

Name	DelayShort
Result type	Void
Parameters	(milliseconds#)
Action	Delays for at least the specified number of milliseconds.
Example	<code>_DelayShort(1500)</code>

Name	DesignSave
Result type	Void
Parameters	((code#))
Action	Saves the current design file. The codes are: 0 or not supplied = Always save. 1 = Only save if modified.
Example	_DesignSave ()

Name	GetFolder
Result type	String
Parameters	("2-part name")
Action	Returns the folder name portion of the 2-part name
Example	_GetFolder("Kitchen – Lights") → "Kitchen"

Name	GetObject
Result type	String
Parameters	("2-part name")
Action	Returns the object portion of a 2-part name.
Example	_GetFolder("Kitchen – Lights") → "Lights"

Name	HCASystemAction
Result type	Bool
Parameters	(code, name, [arg3], [arg4], [arg5], [arg6])
Action	<p>The name argument can be supplied as:</p> <p>"HCA Server" in which case codes 2, 3, and 4 apply to the HCA Server computer.</p> <p>The name of a client as given on the "HCA Options" Client-Server tab</p> <p>The empty string "" in which case all connected clients are sent the operation. If the program containing the _HCASystemAction was manually started on a client but a right-click "Start", that client is NOT effected.</p> <p>The code argument:</p> <p>code = 0 Causes control-only client to reload the current design. Has no effect on the server or HCA.exe operating as a client. No optional arguments</p> <p>code = 1 Causes HCA client or server software to terminate arg3: If supplied, the number of seconds to wait before shutdown</p> <p>code = 2 Causes HCA client computer or HCA Server computer to restart Windows arg3: If supplied, the number of seconds to wait before shutdown</p> <p>code = 3 Causes a new Windows process to be started arg3 = (string) Path to executable file arg4 = (string) Working folder. If omitted uses Windows default arg5 = (string) Executable program arguments added to command line</p>

	<p>arg6 = (number) if non-zero runs the executable minimized</p> <p>If you are using HCA stand-alone (that is, not client-server) then the name argument is ignored and you can use codes 1, 2, or 3.</p>
Example	<code>_HCASystemAction(1, "HCAServer")</code> → Yes

Name	HCAVersionGE
Result type	Bool
Parameters	(majorVersion, [minorVersion], [Build#])
Action	Generates a yes/no value based upon the version of HCA running the program and the supplied arguments.
Example	<p>Example, assume that the current HCA version that is running the program is 16.0.28</p> <p><code>_HCAVersionGE(16)</code> -> Yes</p> <p><code>_HCAVersionGE(17)</code> -> No</p> <p><code>_HCAVersionGE(16, 0)</code> -> Yes</p> <p><code>_HCAVersionGE(16, 1)</code> -> No</p> <p><code>_HCAVersionGE(16, 0, 28)</code> -> Yes</p> <p><code>_HCAVersionGE(16, 0, 29)</code> -> No</p> <p><code>_HCAVersionGE(16, 1, 30)</code> -> No</p>

Name	HostNameToIP
Result type	String
Parameters	(host name string)
Action	Uses the name server to convert a host name to the 4-part IP address. Returns a Boolean NO if the conversion fails.
Example	<code>_HostNameToIP("hcatech.com")</code> → "66.113.102.195"

Name	InterfaceName
Result type	String
Parameters	(interface-number)
Action	Returns the name of the interface with the supplied number (0-7). The numbers are in the order that the interfaces appear on the HCA Options hardware tab.
Example	<code>_InterfaceName(1)</code> → "Insteon"

Name	InterfaceRestart
Result type	Bool
Parameters	None
Action	Disconnects HCA from all automation interfaces and then reconnects. This can help keep the interfaces connected over a long period of time in case Windows decides to close connections not recently used. Returns YES if the operation worked.
Example	_InterfaceRestart() → TRUE

Name	InterfaceStatus
Result type	Bool
Parameters	(interface-number)
Action	Returns the status of the interface with the supplied number (0-7). The numbers are in the order that the interfaces appear on the HCA Options hardware tab. Returns TRUE if working and FALSE if not
Example	_InterfaceStatus(1) → TRUE

Name	MakeValidName
Result type	string
Parameters	("string")
Action	Converts, if necessary, the supplied string into a valid HCA Name. Any characters in an HCA name that are not allowed are replaced by underscore characters.
Example	_MakeValidName("Light:1" → "Light_1"

Name	PgmNote
Result type	void
Parameters	("string", [code])
Action	Displays the text in the program note window if open. If the program notes window is not open, has no effect. The optional "code" argument is not used currently.
Example	_PgmNote("Handling change in levels")

Name	PlaySound
Result type	Bool
Parameters	("path to sound file", code#)
Action	Plays a Sound file using the computer's sound system. The 1st argument is a path to the sound file. The code# argument is as follows: 1: The sound file starts playing and HCA moves to the next element 2: The sound file starts playing and HCA moves to the next element. When the sound file finishes, it starts playing again. 3: The sound file starts playing and HCA waits until it is complete before moving to the

	next element. If you used option #2, later you can stop the sound file playing by using the PlaySound function again with "" for the path.
Example	<code>_PlaySound ("c:\files\beep.wav", 1) → yes</code>

Name	ProblemLevel
Result type	Number
Parameters	None
Action	Returns current problem level as shown by the HCA status bar lights. 0 = Green, 1 = Yellow, 2 = Red.
Example	<code>_ProblemLevel() → 0</code>

Name	RGB
Result type	Number
Parameters	(red#, blue#, green#)
Action	Returns the encoded color for the red, green, blue values specified.
Example	<code>_RGB(51, 51,255) → hex value 3333FF (a nice blue)</code>

Name	Rand
Result type	Number
Parameters	(number1, number2)
Action	Returns a random number chosen between the two numbers supplied.
Example	<code>_Rand (100, 200) → 119</code>

Name	ReportAdd
Result type	Void
Parameters	("text")
Action	Adds a message to be sent in the next Daily Report.
Example	<code>_ReportAdd ("Check battery levels this week")</code>

Name	SetSunriseDelta
Result type	Number
Parameters	(sunrise delta #)
Action	Changes the sunrise delta value that is set in the home properties on the Location tab. This is the number of minutes to add or subtract from the computed sunrise time to be more accurate for your location. Returns the value it was set to before the change was made.
Example	<code>_SetSunriseDelta (20) → 8</code>

Name	SetSunsetDelta
Result type	Number
Parameters	(sunset delta #)
Action	Changes the sunset delta value that is set in the home properties on the Location tab. This is the number of minutes to add or subtract from the computed sunset time to be more accurate for your location. Returns the value it was set to before the change was made.
Example	_SetSunsetDelta (20) → 6

Name	ThisProgram
Result type	String
Parameters	None
Action	Returns the 2-part name of the running program.
Example	_ThisProgram() → "Garden - Watering"

Name	ThisFolder
Result type	String
Parameters	None
Action	Operates like _ThisProgram – to return the name of the running program – but only returns the folder part.
Example	_ThisProgram() → "Garden"

Name	TileUpdate																								
Result type	Bool																								
Parameters	("tile name", code#, [x], [y])																								
Action	<p>Updates the names tile based upon the parameters.</p> <table border="1"> <thead> <tr> <th>Code</th> <th>Use</th> <th>Arg3</th> <th>Arg4</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Change label</td> <td>Label text</td> <td>Not used</td> </tr> <tr> <td>1</td> <td>Change colors</td> <td>Background color</td> <td>Text color</td> </tr> <tr> <td>2</td> <td>Change image path</td> <td>Image path</td> <td>Not used</td> </tr> <tr> <td>3</td> <td>Change text</td> <td>Text</td> <td>Not used</td> </tr> <tr> <td>4</td> <td>Refresh</td> <td>Not used</td> <td>Not used</td> </tr> </tbody> </table>	Code	Use	Arg3	Arg4	0	Change label	Label text	Not used	1	Change colors	Background color	Text color	2	Change image path	Image path	Not used	3	Change text	Text	Not used	4	Refresh	Not used	Not used
Code	Use	Arg3	Arg4																						
0	Change label	Label text	Not used																						
1	Change colors	Background color	Text color																						
2	Change image path	Image path	Not used																						
3	Change text	Text	Not used																						
4	Refresh	Not used	Not used																						
Example	_TileUpdate ("StatusTile", 0, "Good") → yes (if there was a tile with that name, NO otherwise).																								

Name	VarValue
Result type	Any
Parameters	("variable name")
Action	Returns the value of the named variable given as a text string. If the variable doesn't exist a global variable is created with default value of NO.
Example	_VarValue("Counter") → 10

Abs, 10
 AddressForDevice, 40
 AlertAdd, 47
 AlertClear, 48
 AlertCount, 48
 AlertLevel, 49
 AlertName, 49
 Asc, 7
 Assign, 49
 AutoOffTime, 21
 BarometerConvert, 33
 BarometerUnits, 33
 ChangeSchedule, 21
 Choose, 10
 Chr, 7
 CurrentScene, 22
 CurrentSchedule, 23
 CurrentWattage, 40
 DarkSky, 32
 Date, 14
 DateTime, 14
 Day, 14
 DayNight, 24
 DayOfWeek, 14
 DayOfYear, 14
 Days, 15
 DecToHex, 7
 Delay, 49
 DelayShort, 49
 DesignClose, 41
 DesignName, 41
 DesignOpen, 40
 DesignSave, 50
 DesignTitle, 41
 DeviceForAddress, 41
 DimDownPercent, 24
 DimPercent, 24
 DimToPercent, 24
 DimUpPercent, 25
 FileClose, 36
 FileExists, 36
 FileLoad, 36
 FileOpen, 36
 FileReadString, 37
 FileWriteString, 37
 FormatInt, 19
 FormatNum, 19
 FormatPatten, 19
 FormatTime, 20
 GetDeviceKind, 41
 GetDeviceMake, 42
 GetDeviceModel, 42
 GetDeviceProtocol, 42
 GetFolder, 50
 GetObject, 50
 GetObjectProperty, 42
 GetThermostat, 31
 GroupMemberCount, 43
 GroupMemberName, 43
 HCAFolder, 37
 HCASystemAction, 50
 HCAVersionGE, 51
 HexToAscii, 10
 HexToDec, 7
 HomeMode, 43
 HostNameToIP, 51
 Hour, 15
 Hours, 15
 Hue, 25
 HueColorCreate, 25
 HumidityUnits, 33
 IconChange, 26
 IconChangeEx, 26
 IconExists, 26
 IIF, 11
 InsteonBeep, 27
 InStr, 7
 Int, 11
 InterfaceName, 51
 InterfaceRestart, 52
 InterfaceStatus, 52
 IsBool, 11
 IsCurrentSchedule, 27
 IsDate, 11
 IsDim, 27
 IsDisabled, 27
 IsEven, 11
 IsInErrorState, 27
 IsNumber, 12
 IsOdd, 12
 IsOff, 28
 IsOn, 28
 IsRunning, 28
 IsSuspended, 28
 IsText, 12
 IsValidObject, 43
 Json, 38
 JsonClose, 38
 JsonCurrentKey, 39
 JsonCurrentValue, 39
 JsonDown, 38
 JsonNext, 39

JsonOpen, 38
 JsonPrev, 39
 JsonUp, 39
 LastControlTime, 43
 LastReceptionTime, 44
 Lcase, 8
 Left, 8
 Len, 8
 LocalToUTC, 15
 LTrim, 8
 MakeValidName, 52
 Match, 8
 Max, 12
 Mid, 9
 Min, 12
 Minute, 15
 Minutes, 15
 ModifySchedule, 21
 Month, 16
 MonthName, 16
 Now, 16
 Num, 13
 ObjectTagClear, 44
 ObjectTagDelete, 44
 ObjectTagExists, 44
 ObjectTagGet, 45
 ObjectTagSet, 45
 Off, 29
 On, 29
 ParseTime, 16
 PgmNote, 52
 PlaySound, 52
 ProblemLevel, 53
 RainConvert, 33
 RainUnits, 33
 Rand, 53
 ReportAdd, 53
 RGB, 53
 Right, 9
 Round, 13
 RTrim, 9
 Second, 16
 Seconds, 16
 SetCurrentState, 29
 SetCurrentWattage, 45
 SetHomeMode, 29
 SetObjectProperty, 45
 SetRunAgainTime, 30
 SetSchedule, 30
 SetSunriseDelta, 53
 SetSunsetDelta, 54
 SetThermostat, 31
 SetToScene, 30
 SolarRadiationunits, 33
 StartProgram, 30
 Statistics, 46
 Status, 46
 Sunrise, 17
 Sunset, 17
 TempConvert, 34
 TempUnits, 34
 TextPiece, 9
 TextReplace, 9
 ThisFolder, 54
 ThisProgram, 54
 TileUpdate, 54
 Time, 17
 TimeSpan, 17
 TotalHours, 17
 TotalMinutes, 17
 TotalSeconds, 18
 Trim, 10
 Ucase, 10
 UTCToLocal, 18
 UVUnits, 34
 VarValue, 55
 WeatherGet, 32
 Weekday, 18
 WeekdayName, 18
 WindDirection, 34
 WindDirUnits, 34
 WindSpeedConvert, 34
 WindSpeedUnits, 35
 Year, 18